

DAB SUPPLY/EXHAUST AIR VALVE

AIR MANAGEMENT SYSTEMS


PRODUCT PROPERTIES

Plastic air **DAB** valve with six-step adjustable disc and spring fastening.

- Diameter range 80, 100, 125, 150 and 160 mm
- Manufactured out of white polypropylene (RAL 9003) with a heat resistance up to 100°C.
- Suitable for rooms with a higher air humidity (e.g. kitchen and bathroom).
- Easy to remove for cleaning purposes.
- Suitable for direct mounting in round, rigid ducts.
- Fast and simple to adjust by a six-step adjustable disc.
- The combination of sealing tape and spring fastening provides an optimal sealing.

DIMENSIONS in mm

SIZE	A	B	C
DAB080	60	130	20
DAB100	80	150	20
DAB125	101	171	20
DAB150	118	186	20
DAB160	118	186	20

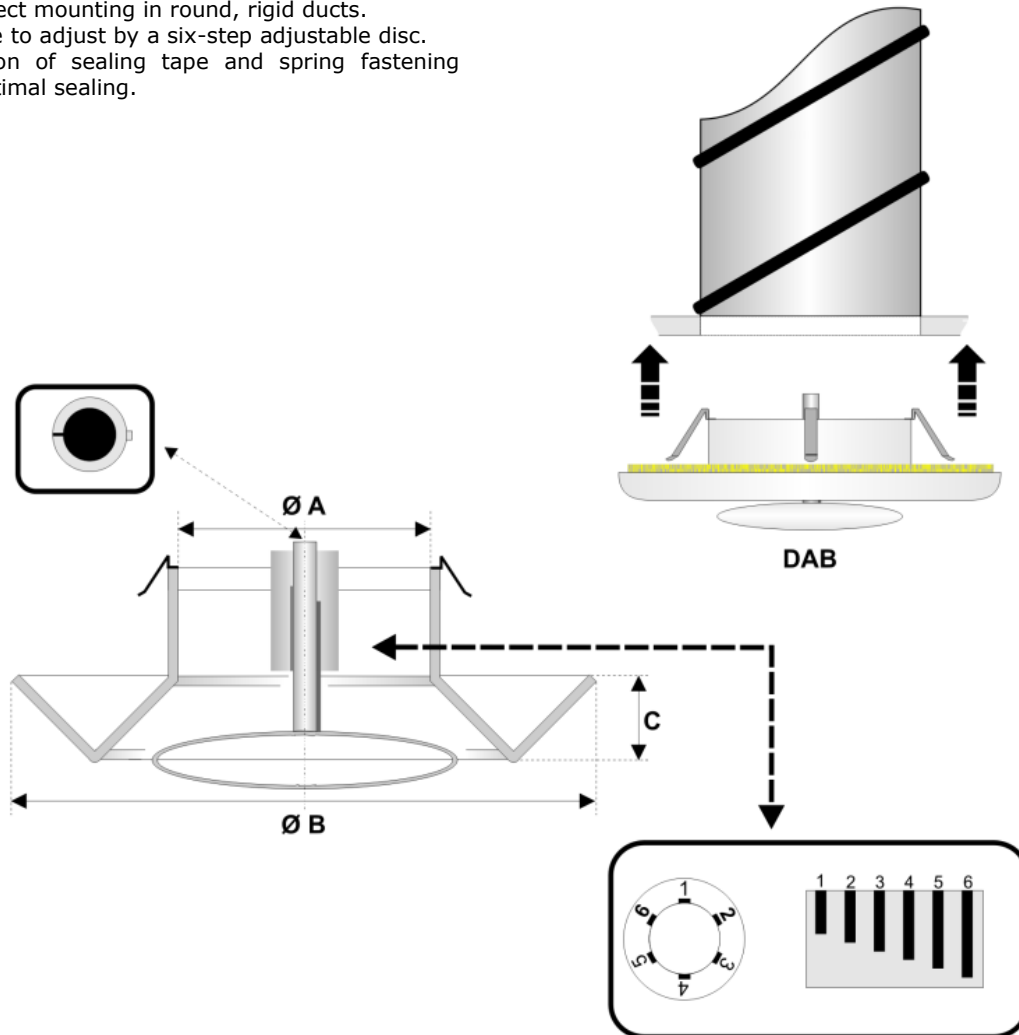

LIABILITY:


The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:


DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

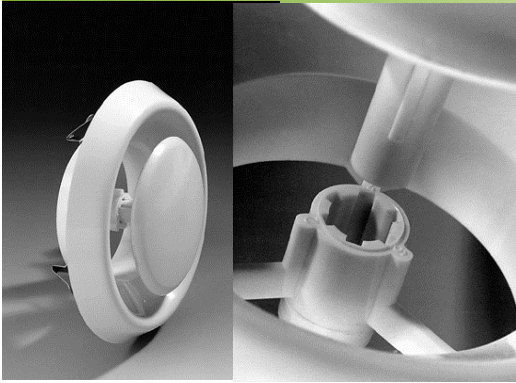


DAB SUPPLY/EXHAUST AIR VALVE

AIR MANAGEMENT SYSTEMS


DAB 080 mm

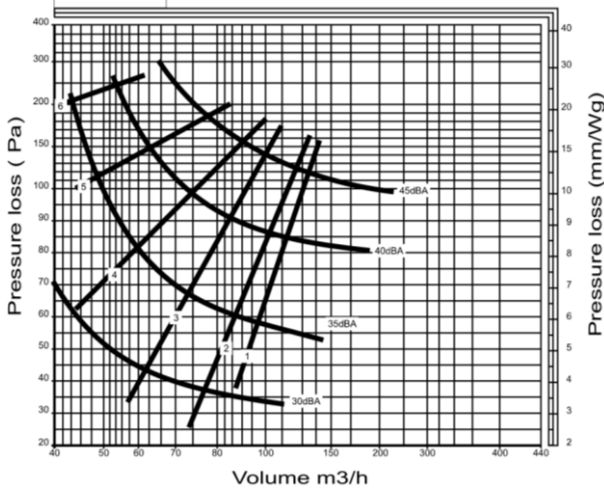


DAB 150 mm

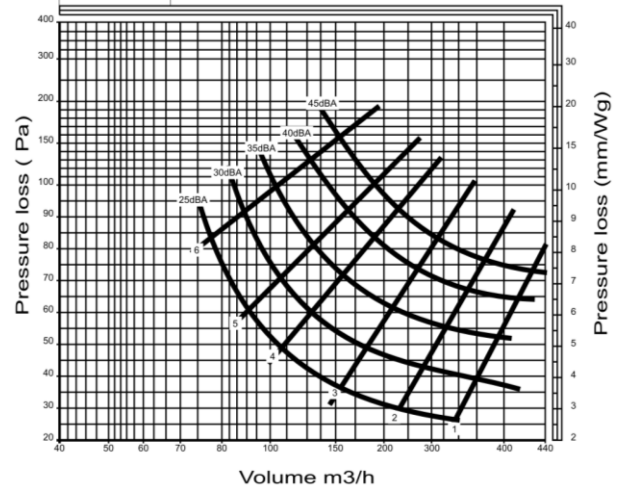


DAB 100 mm

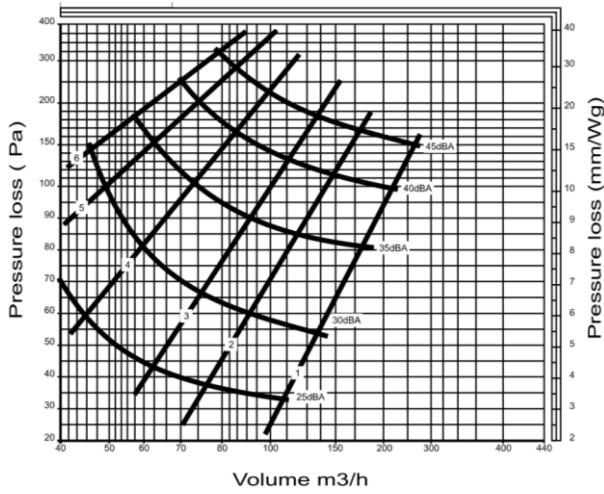

DAB 160 mm

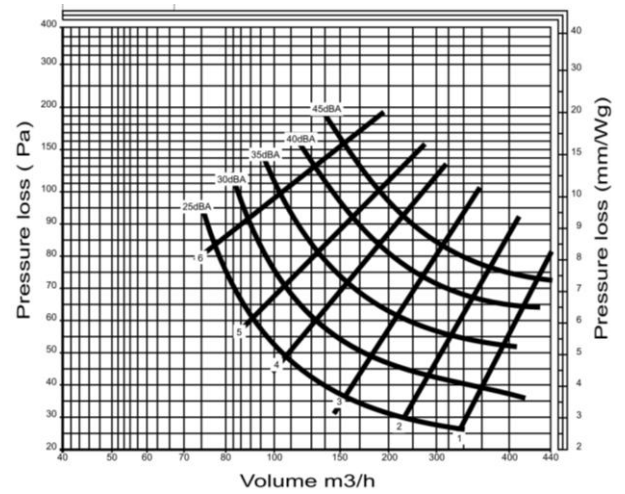

DAB 125 mm

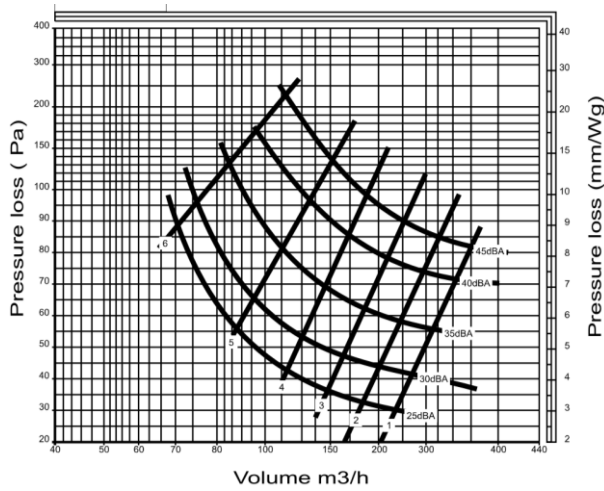

LIABILITY:
The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:
The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:
DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.