

GREYDEC 222

WELDEC - SYNTHETIC DUCTING

The **GREYDEC 222** ducts are light weight and very flexible ducting of PVC-coated fabric, for several applications. The ducts are suitable for flexible mounting and can be mounted to round and oval connection pieces. The **GREYDEC** ducts are also capable of absorbing prolonged vibrations because of its mechanical strength.

The **GREYDEC 222** consisting of a glass fabric, coated on both sides with a copolymer. The spiral wire has been inserted into the fabric.

APPLICATIONS


- Mechanical air supply systems
- Machine exhausting
- Air supply and ventilation systems
- Air supply cabinet in air conditioning systems
- Suction of welding fumes

PROPERTIES

- Excellent flexibility
- Good compression
- Self-extinguishing

CONSTRUCTION


- 1/ Spring steel Helix
- 2/ Wall: PVC coated glass fabric
- 3/ Wall thickness between the windings ca. 0.22 (mm)

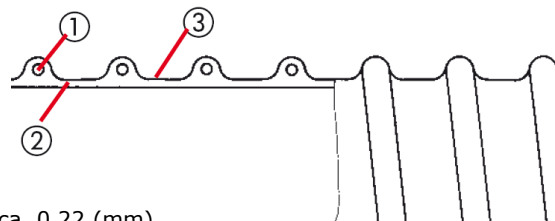

SPECIFICATIONS

Article code:	DG222{Ø}
Temperature range:	-30 °C to 70 °C
Operating pressure:	up to +3000 Pa
Operating air velocity:	max. 30 m/s
Bending radius:	min. 1 x Ø
Standard diameter range:	82 – 508 mm
Standard length:	10 mtr
Wire spacing:	22 mm
Appearance:	Grey*
* Also available in:	White/Black

PRESSURE LOSS (STRAIGHT DUCT)

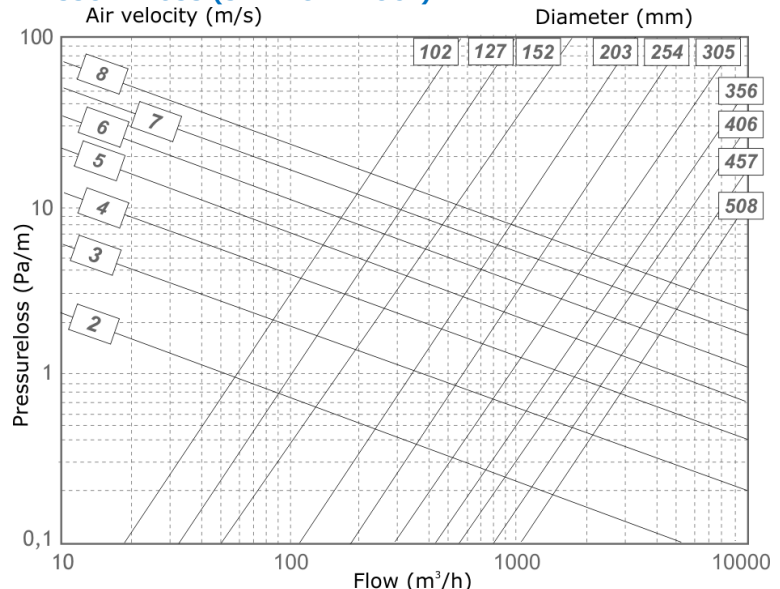

Technical data	
Interior Ø = D mm	Max Vacuum mbar
82	163
102	163
127	114
152	85
160	78
165	75
203	53
254	33
508	10

The **GREYDEC** fulfills all the requirements and are classified as specified within EN 13180:
Ventilation for buildings – Ductwork - Dimensions and mechanical requirements for flexible ducts.

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

GREYDEC, the DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The GREYDEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.